


# Air flow sensor | with IO-Link

- Dynamic pressure principle
- Plug-in sensor for big pipes
- Consumption measurement
- Configurable via IO-Link



## Design Ø 15

### Dimensions

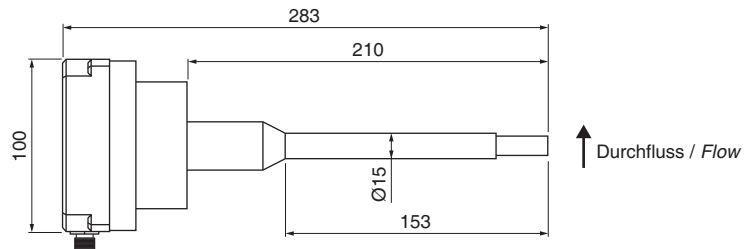

Detection ranges air	depending on inner pipe diameter $d = 38...200$ [mm]
Flow [Nm <sup>3</sup> /h]	example $d = 38$ : 14...1400, $d = 50$ : 27...2650, $d = 100$ : 121...12150, $d = 200$ : 515...51500
Temp. / Pressure [°C] / [bar abs]	0...60 / 0.00...14.00
Output	/  /  /  IO-Link PNP/NPN-NO/NC 200 mA (20 °C) / 4...20 mA / pulse output PNP/NPN-NO / IO-Link
ID-No.	P11388
Type	LDS 1000 GAPL
Process data	
Consumption [Nm <sup>3</sup> x 0.001]	0...999999 x 10 <sup>6</sup>
Flow [% x 0.01]	0...10000
Pressure [bar x 0.1]	0...140
Temperature [°C x 0.1]	0...600
Measurement error	flow: $\pm$ (8% of measurement value + 0.5% of end value) / temperature: $\pm$ 2 °C
Supply voltage [V]	18...30 DC
Current consumption [mA]	<105
Ambient temperature [°C]	0...+60
Medium temperature [°C]	0...+60
Start-up time / Reaction time [s]	4...12 / <0.3
Adjustable parameters	output functions, switching points, units, range, average value, MIN/MAX value
IO-Link-Specifications	revision 1.1, baud rate COM 2, min. cycle time 6 ms, process data 10 Byte
Compressive strength [bar]	11 (burst pressure 16)
Material	housing: aluminium, PBT-GF30 sensor: aluminium, stainless steel, ceramic, epoxy
Protection [EN 60529]	IP 54
Connection	M12 connector
1Reference 1013 mbar / 20 °C	
Note: Screw-in union G1/2 (zinc-coated steel) is part of delivery	<p>figure: PNP output</p> <p>2 (WH): 4...20 mA / PNP/NPN output / Input                      4 (BK): PNP/NPN output / pulse output / IO-Link                      RL: 200...500 Ohm</p>
Accessories	IO-Link/USB master set (Z01216), screw-in union G1/2-Ø 15 (Z01290), weld-on union Ø 30 (Z01291)