


DR15S-M30E-IOL8X2-H1141

Radar – Distance/Object Detection

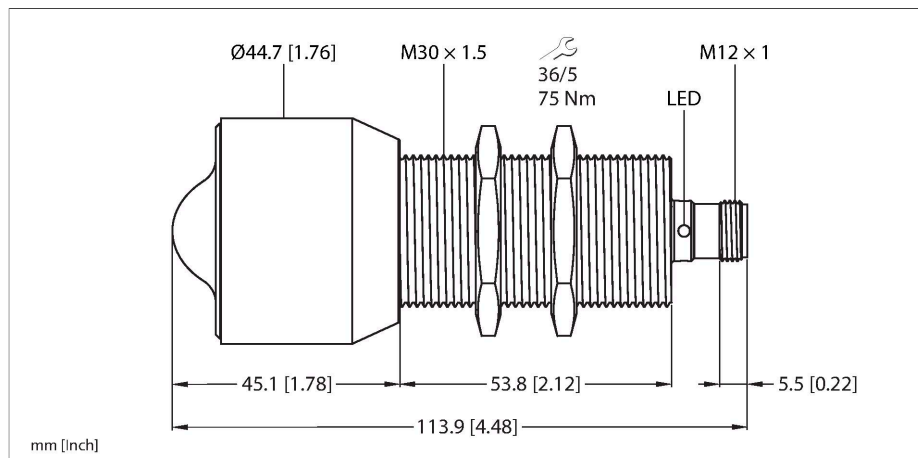


Technical data

Type	DR15S-M30E-IOL8X2-H1141
ID	100030148
Radar data	
Function	Radar scanner
Frequency range	122 - 123 GHz
Range	350...15000 mm
Resolution	1 mm
Minimum measuring range	500 mm
Minimum switching range	500 mm
Linearity error	≤ ± 0.1 %
Edge lengths of the nominal actuator	100 mm
Output power ERP	10 dBm
Output power EIRP	20 dBm
Cone angle	15 °
Repeatability	2 mm
Hysteresis	≤ 50 mm
Electrical data	
Operating voltage	17...33 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 250 mA
No-load current	≤ 100 mA
Residual current	≤ 0.1 mA
Short-circuit protection	yes / Cyclic
Reverse polarity protection	yes
Communication protocol	IO-Link
Output function	NO/NC programmable, PNP/NPN, analog output

Features

- Blind zone: 35 cm
- Range: 15 m
- Resolution: 1 mm
- Cone angle of the radar beam: Standard ±7.5°
- Approved according to ETSI 305550-2
- Approved according to FCC/CFR. 47 Part 15. (outstanding)
- M12 × 1 male connector, 4-pin
- Operating voltage 18...33 VDC
- Switching output switchable between PNP/ NPN
- Analog output switchable between 4... 20 mA/0...10 V
- Automatic current/voltage detection
- IO-Link
- Cylindrical housing M30

Wiring diagram

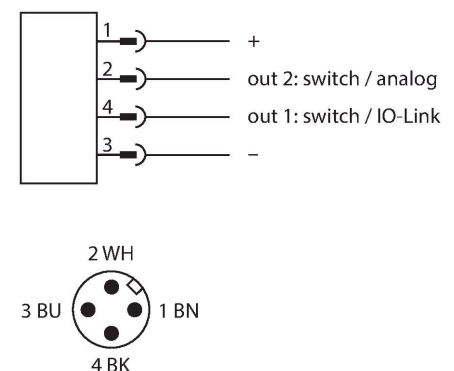


Functional principle

FMCW radar stands for frequency modulated continuous wave radar. FMCW is the English abbreviation for Frequency Modulated Continuous Wave. Non-modulated continuous

Technical data

Output 2	Analog output
Current output	4...20 mA
Voltage output	0...10 V
Load resistance current output	≤ 0.5 kΩ
Load resistance voltage output	≥ 8 kΩ
Voltage drop at I ₀	≤ 2 V
Switching frequency	≤ 10 Hz
Readiness delay	≤ 450 ms
Response time typical	< 10 ms
IO-Link	
IO-Link specification	V 1.1
IO-Link port type	Class A
Communication mode	COM 2 (38.4 kBaud)
Process data width	32 bit
Measured value information	28 bit
Switchpoint information	1 bit
Frame type	2.2
Minimum cycle time	3 ms
Function Pin 4	IO-Link
Function Pin 2	Analog
Maximum cable length	20 m
Profile support	Smart Sensor Profil
Mechanical data	
Design	Threaded barrel, M30E
Dimensions	Ø 44.7 x 104.3 mm
Housing material	Stainless steel, 1.4401 (AISI 316) PTFE
Max. tightening torque of housing nut	75 Nm
Electrical connection	Connector, M12 × 1
Ambient temperature	-25...+65 °C
Storage temperature	-40...+85 °C
Protection class	IP67 IP69K
	Not assessed by UL
Power-on indication	LED, Green
Switching state	2-color LED, Yellow
MTTF	187 years
Vibration resistance	20 g (10...2000 Hz), EN 60068-2-6
Shock test	EN 60068-2-27
Shock resistance	100 g (11 ms)
EMV	EN 61000-6-2:2019 ETSI EN 301489-3 v.1.6.1

wave radars have the disadvantage that they cannot measure distances due to lack of time reference. Such a time reference for distance measurement of stationary objects can be generated by means of frequency modulation. Using this method, a signal is emitted which continually changes the frequency. A periodic, linear frequency which varies upwards and downwards is used to limit the frequency range and to simplify the signal evaluation. The factor for the rate of change df/dt remains constant. If an echo signal is received, then this has a runtime delay as with the pulse radar, and thus a different frequency that is proportional to the distance.

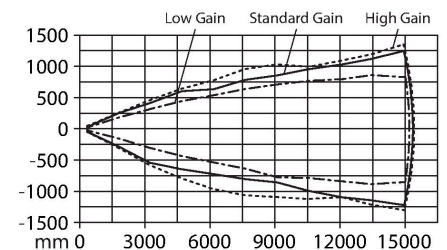

Technical data


Approvals

CE, ETSI, FCC (outstanding), UL

Accessories

BSS-30


6901319

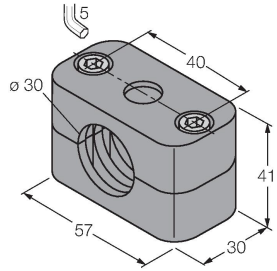

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

MW-30

6945005

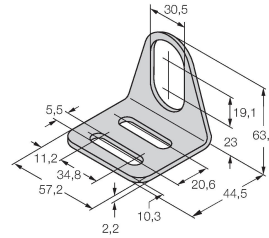

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

Accessories

Dimension drawing

Type

ID

TBEN-S2-4IOL

6814024

Compact multiprotocol I/O module, 4 IO-Link Master 1.1 Class A, 4 universal PNP digital channels 0.5 A

