


# IM21-14-CDTRI

## Rotation speed monitor – 1-channel

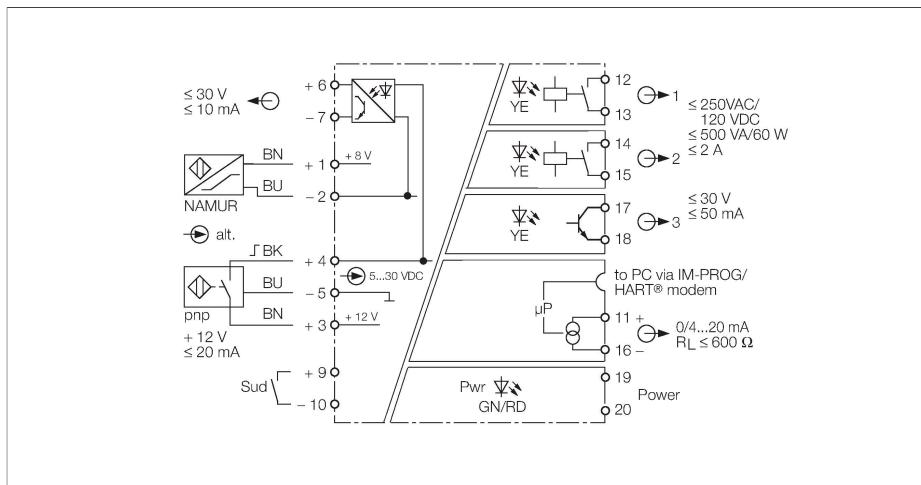


The rotation speed monitor IM21-14-CDTRI analyses frequencies, rotation speeds and pulse trains of rotating motor, gear or turbine parts according to over or undershoot of adjusted limit values. The current value is indicated on a display on the front of the device.

If NAMUR sensors are connected the input circuit is monitored for wire-break and/or short-circuit. In the event of an input circuit error the relays drop out, the transistor is blocked and the Pwr LED changes to red.

The device can be parameterized and configured via PC (FDT / DTM). For this, connect the device to the PC via the 3.5 mm jack on the front (the matching transmission cable IM-PROG III can be ordered separately from TURCK). In addition, a basic scope of parameters can be set via buttons and display on the front as well as via the HART® capable power interface

At each of the two relay outputs a predefined limit value can be monitored. The two relays also monitor overshoot/undershoot of window limits. The transistor output can also be used as a pulse divider. The measured value is permanently written to a ring buffer with space for 8000 values. The writing process is stopped with a predefined trigger event, like for example "excess of limit value". After that, the stored signal sequence can be read out.


A switching hysteresis is defined by setting a switch-on and off point. A switch-off delay can also be set to avoid shut down due to sudden frequency hops.

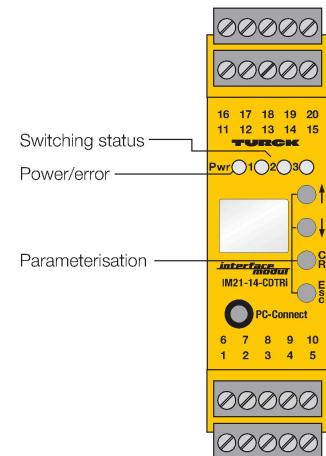

### Features

- Monitoring of limit values and ranges according to over/underrange
- Operating range 0.06 ... 600000 min<sup>-1</sup>
- Connection of sensors acc. to EN 60947-5-6 (NAMUR), 3-wire sensors and external power supplies
- Pulse output
- Parameterized via PC (FDT/DTM), front-panel switch and HART
- Ring buffer for up to 8000 measured values
- Display
- Complete galvanic isolation
- Input reverse-polarity protected
- TR CU


### Dimensions

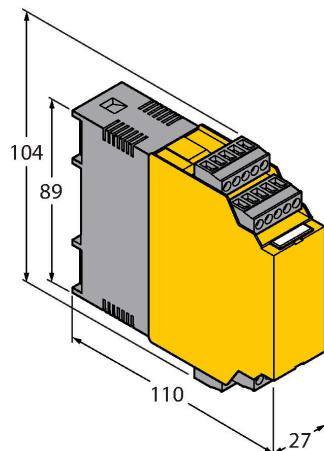


## Technical data

Type	IM21-14-CDTRI
ID	7505650
Nominal voltage	Universal voltage supply unit
Operating voltage	20...250 VAC
Frequency	40...70 Hz
Operating voltage	20...250 VDC
Power consumption	$\leq 3 \text{ W}$
Monitoring range/Setting range	$\leq 0.06\ldots 600000 \text{ min}^{-1}$
Max. input frequency	600000 $\text{min}^{-1}$
Pulse time	$\geq 0.02 \text{ ms}$
Pulse pause	$\geq 0.02 \text{ ms}$
NAMUR input	
NAMUR	EN 60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 k $\Omega$
Cable resistance	$\leq 50 \Omega$
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	$\leq 0.06 \text{ mA}$
Short-circuit threshold	$\geq 6.4 \text{ mA}$
3-wire input	
No-load voltage	12 VDC
Current	$\leq 20 \text{ mA}$
Input resistance	600 $\Omega$
0-signal	0...3VDC
1-signal	5...30 VDC
External signal source	
0-signal	0...3 VDC
1-signal	5...30 VDC
Input resistance	26000 $\Omega$
Output current	0/4...20 mA
Load resistance current output	$\leq 0.6 \text{ k}\Omega$
Fault current	0 / 22 mA adjustable
Output circuits (digital)	2 x relays (NO)
Output switching voltage relay	$\leq 30 \text{ VDC} / \leq 250 \text{ VAC}$
Switching current per output	$\leq 2 \text{ A}$
Switching capacity per output	$\leq 500 \text{ VA}/60 \text{ W}$
Switching frequency	$\leq 10 \text{ Hz}$
Semiconductor output circuit(s)	
Output circuits (digital)	1 x transistor (potential-free, short-circuit proof)

## Output relay – Load curve

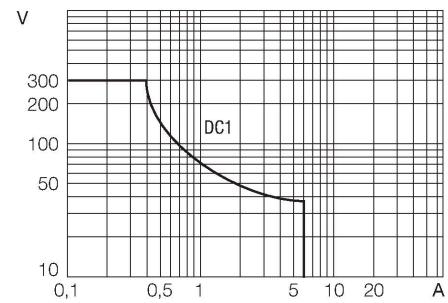



## Output relay – Electrical lifetime

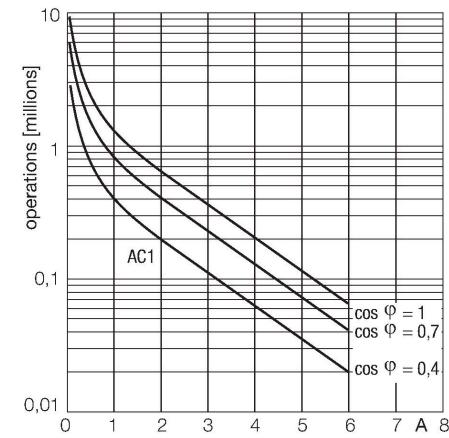

## Technical data

Switching voltage	$\leq 30$ VDC
Switching current per output	$\leq 0.05$ A
Switching frequency	$\leq 10000$ Hz
Voltage drop	$\leq 2.5$ V
Feed-forward pulse output	
Voltage	$\leq 30$ V
Current	$\leq 10$ mA
Measuring accuracy (including linearity, hysteresis and repeatability)	$\leq 0.05$ % of full scale
Reference temperature	23 °C
Temperature drift analog output	0.0025 %/K
Galvanic isolation	
Test voltage	2.5 kV RMS
Indication	
Power on display	Green
Pulse input	Yellow
Error indication	red
Protection class	IP20
Flammability class acc. to UL 94	V-0
Ambient temperature (min.)	-25
Ambient temperature (max.)	70
Storage temperature	-40...+80 °C
Dimensions	104 x 27 x 110 mm
Weight	247 g
Mounting instructions	DIN rail (NS35) or panel
Housing material	Polycarbonate/ABS
Electrical connection	4 x 5-pin removable terminal blocks, reverse polarity protected, screw terminal
Terminal cross-section	1 x 2.5 mm <sup>2</sup> / 2 x 1.5 mm <sup>2</sup>
Tightening torque	0.5 Nm

## Accessories

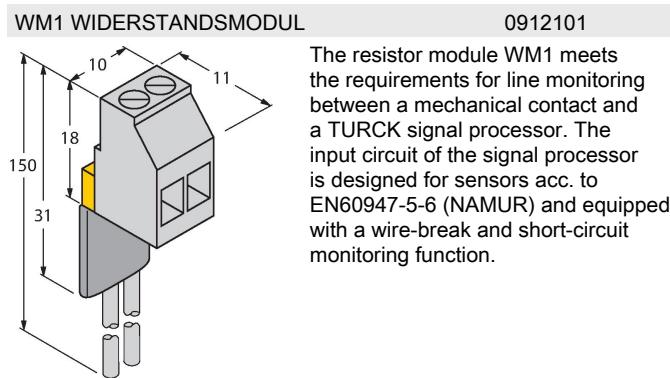


7525111

USB-compatible programming adapter for the FDT/DTM-based parametrization of HART-capable Turck devices; galvanic separation between the device to be parametrized and the PC

IM-CC-5X2BK/2BK

7541219



Cage clamp terminals for IM modules  
( Ex-devices with 27 mm overall  
width); includes: 4 pcs. of 5-pin black  
terminals

## Accessories

Dimension drawing

Type  
IM-SC-5X4BKID  
7541217